


ELEC EXTRA NYLON PREMIUM CABLE TIES - BLACK

Material	: Nylon PA66
Operating Temperature	: -40°C to 85°C
Install Temperature	: 0°C
Usage	: Indoor and Outdoor
Resistance	: UV resistance
Flame Rating	: UL 94-V2
Features	: Halogen free, low smoke
Compliance	: RoHS, UL, DNV, CE, Lloyd's Register, VDE



*All dimensions in millimetres unless specified

Part Number	Length	Width	Min. Loop Tensile Strength (N)	Min. Loop Tensile Strength (kg)	Max. Bundle Diameter	Bag Quantity	Box Quantity
ELCT 100MB	100	2.5	78	8	22	100	400
ELCT 200MB	203	2.5	78	8	55	100	190
ELCT 140IB	142	3.2	176	18	34	100	170
ELCT 200IB	203	3.6	176	18	52	100	150
ELCT 300IB	292	3.6	176	18	82	100	100
ELCT 160S B	160	4.8	215	22	39	100	100
ELCT 200S B	203	4.8	215	22	52	100	90
ELCT 200S B /1000	203	4.8	215	22	52	1000	10
ELCT 280S B	280	4.8	215	22	77	100	80
ELCT 280S B /1000	280	4.8	215	22	77	1000	10
ELCT 370S B	368	4.8	215	22	105	100	60
ELCT 430S B	432	4.8	215	22	125	100	50
ELCT 200HDB	203	7.6	539	55	52	100	50
ELCT 300HDB	300	7.6	539	55	80	100	40
ELCT 370HDB	360	7.9	539	55	101	100	30
ELCT 530HDB	550	8	539	55	160	100	10
ELCT 810HDB /100	812	9	784	80	243	100	10
ELCT 1220HDB /100	1220	9	784	80	372	100	10
ELCT 550EHDB	550	12.7	1117	114	160	100	10

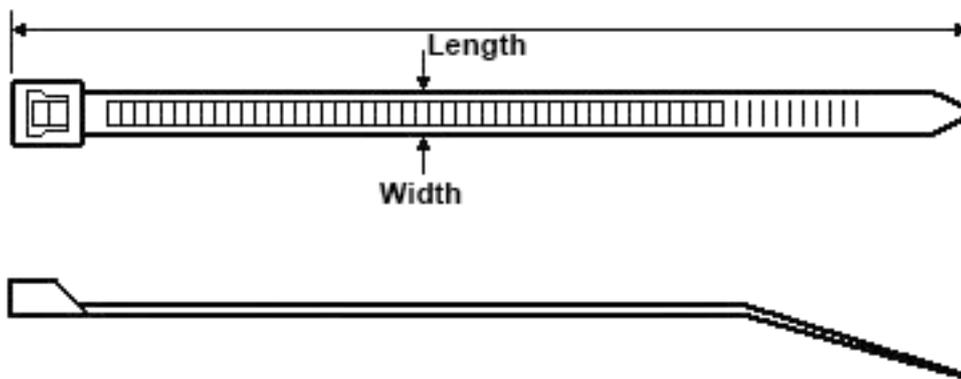

Tooling

Part Number	Description
LY600A and LY600T	Nylon Cable Tie Gun - For cable tie width from 2.4mm to 4.8mm
LY519	Heavy duty manual cut off For cable tie thickness up to 9.5mm
LY600L	Heavy duty auto cut off For cable tie thickness up to 13mm