


PREMIUM NYLON CABLE GLANDS

Material	: Nylon PA66 EPDM rubber
IP Rating	: IP68
Operating Temperature	: -40°C to 105°C
Metric Thread	: 1.5mm
Features	: Halogen free, low smoke UV resistant
Compliance	: RoHS, CE, IEC, REACH, IEC 60529



*All dimensions in millimetres unless specified

Part Number	Min. Cable Range	Max. Cable Range	Lockut (Flat to Flat)	Locknut (Point to Point)	Hole Size C1	Thread Length C2
NCG12A	4.5	8	17.9	19.0	12	8.6
NCG16A	5	10	22.0	24.0	16	14.8
NCG20A	8.5	14.5	27.1	29.5	20	14.8
NCG25A	12.5	19	33.2	36.2	25	15
NCG32A	18.5	25.5	41.0	45.4	32	15
NCG40A	23	31.8	49.5	53.8	40	20
NCG50A	32	42.5	62.1	66.8	50	21.8
NCG63S	34	44.5	73.9	81.0	63	17.5
NCG63A	40	51	73.9	81.0	63	25.5

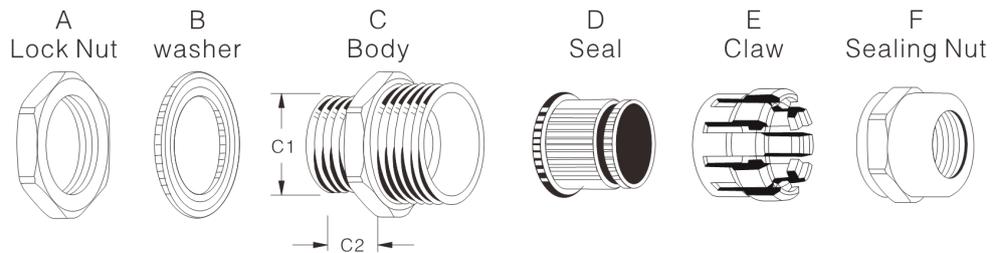



— **Cap**



— **Claw**



— **Body**



— **Rubber Washer**



— **Locknut**