


SOLAR GLAND INSERT - 25mm

Material : Black EPDM, PA UL94V-2
 Operating Temperature : -40°C to 105°C
 Features : Halogen free
 Compliance : RoHS, CE, IEC, REACH




*All dimensions in millimetres unless specified


| Part Number | Number of Holes | Hole Size | Suits | Bag Quantity | Box Quantity |
|-------------|-----------------|-----------|--------|--------------|--------------|
| NCG25-IN2-6 | 2 | 6 | NCG25A | 5 | - |
| NCG25-IN2-8 | 2 | 8 | NCG25A | 5 | - |
| NCG25-IN3-7 | 3 | 7 | NCG25A | 5 | - |
| NCG25-IN4-6 | 4 | 6 | NCG25A | 5 | - |
| NCG25-IN5-5 | 5 | 5 | NCG25A | 5 | - |




NCG25-IN2-6

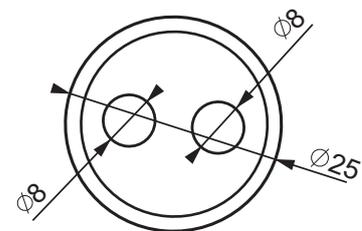


NCG25-IN2-8

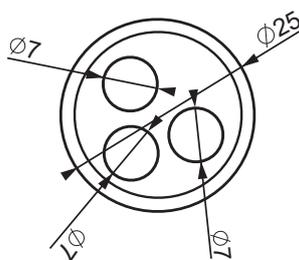

NCG25-IN3-7

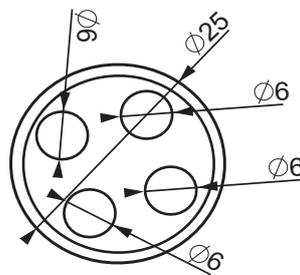

NCG25-IN4-6

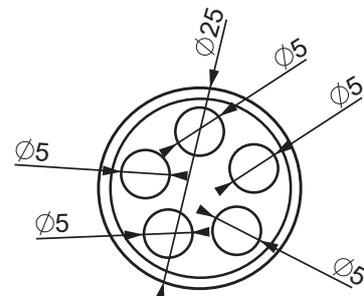

NCG25-IN5-5