

PREMIUM METAL CABLE GLANDS (HIGH TEMP WITH LOCKNUT)

Material : Sealing Nut, Body, Locknut - Nickel Plated Brass
 Claw - Nylon PA
 Rubber seal - White silicone
 Washer - White Silicone

IP Rating : IP68

Operating Temperature : -40°C to 105°C

Maximum Temperature : 200°C


Features : Halogen free, low smoke

Compliance : RoHS, IEC 62444



*All dimensions in millimetres unless specified

Part Number	Min. Cable Range	Max. Cable Range	Locknut (Flat to Flat)	Locknut (Point to Point)	Hole Size C1	Thread Length C2
MCG12	4.5	7.8	17.06	18.97	12	8.0
MCG16	6	10	21.86	24.49	16	8.0
MCG20	9	14	25.03	28.37	20	9.5
MCG25	14	18	30	33.33	25	12.0
MCG32	18	25	40	44.11	32	12.5
MCG40	24	30	50	55	40	15.0
MCG50	31	40	59	65	50	15.0
MCG63	35	45	68	73	63	17.0
MCG63-L	44	51	75	79	63	17.0
MCG75	47	56	93.5	99.3	75	22.0
MCG80	56	66	93.5	99.3	80	22.0

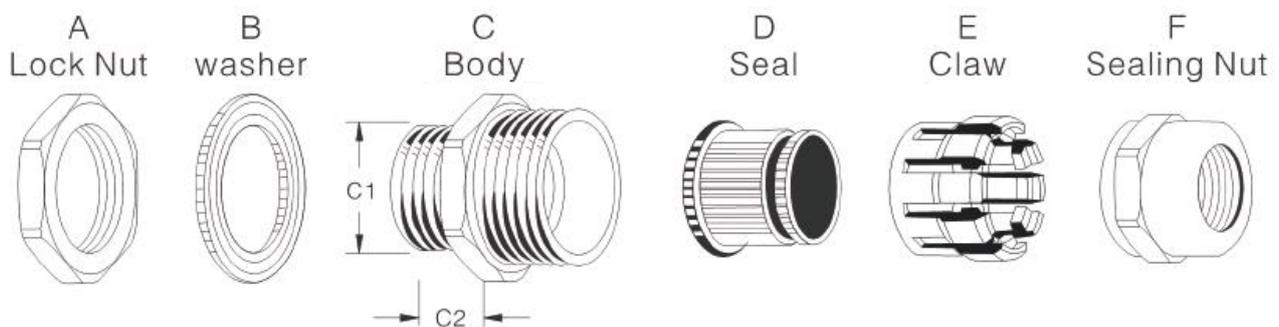



— **Sealing Nut**



— **Claw**



— **Body**



— **Rubber Washer**



— **Locknut**